

### Important Content Update Message

We are currently updating the OP Help Center content for the release of OP 20. OP 20 (official version 20.0.x) is the certified, 2015 Edition, version of the Office Practicum software. This is displayed in your software (**Help tab > About**) and in the Help Center tab labeled Version 20.0. We appreciate your patience as we continue to update all of our content.

# Instamed Credit Card Swiper Configuration

Last Modified on 12/23/2019 12:45 pm EST




**Note:** This documentation applies to the OP Cloud environment.

The approved Magtek Reader is the Dynamag MAG-21073075.

To convert your device between Keyboard Emulation and HID modes:


1. Go to: <https://rs.magensa.net/rs2/app/publish.htm>.
2. Click **Install** to download the application.
3. After the install has finished downloading, run **setup.exe** and install the application using the default settings.
4. Run the Reader Configuration program.
5. Select, **Use Public Account**

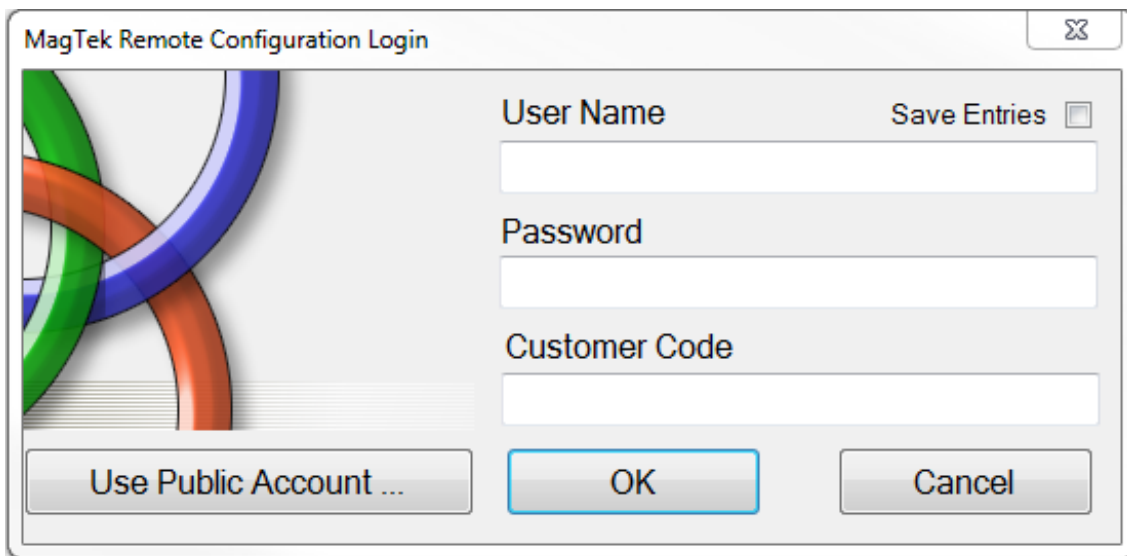

The image shows a dialog box titled "MagTek Remote Configuration Login". It features a decorative graphic on the left with three interlocking rings in green, blue, and orange. On the right, there are three text input fields labeled "User Name", "Password", and "Customer Code". To the right of the "User Name" field is a "Save Entries" checkbox. At the bottom of the dialog, there are three buttons: "Use Public Account ...", "OK", and "Cancel".

6. Click the **Reader Config Options** dropdown arrow and select MODE\_KBE from the dropdown menu.

7. Click the **Change Config** button.

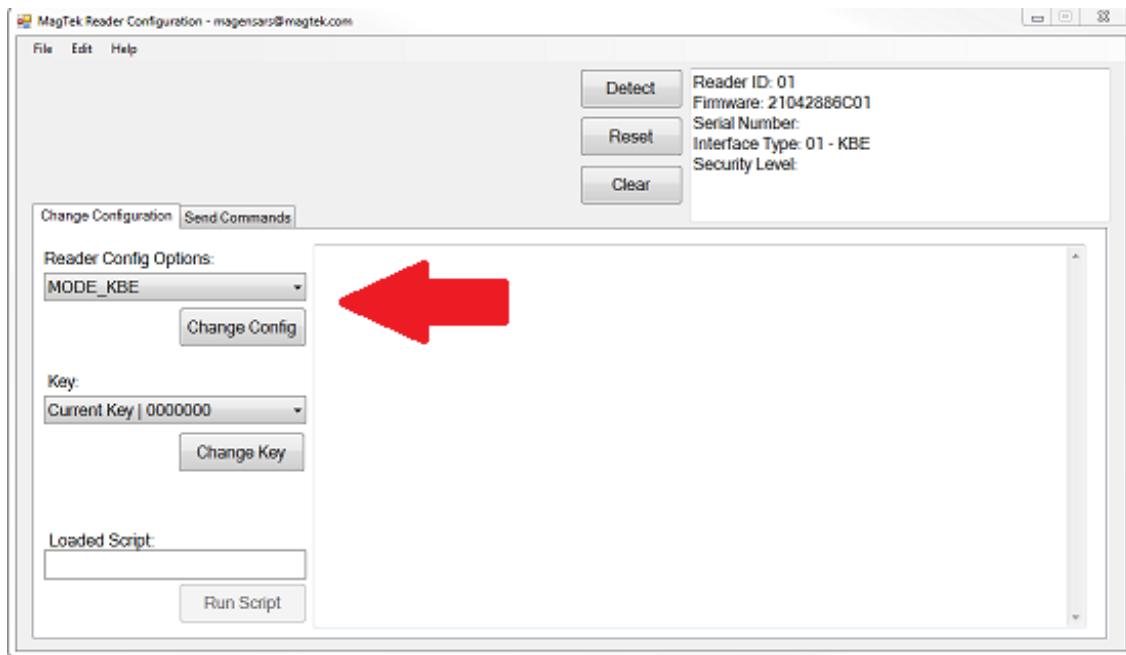

8. Click the **Detect** button.

9. Make sure the Mode field in the upper right reflects Keyboard.